

System Advantages

- High quality 10mm fixture provides a robust platform for initial process set up, plus periodic checking and comparison
- Underside titanium contact sensors give highest measurement accuracy on Wave Height, Main and Chip wave parameters
- Custom widths and sensor positions available for fixed width production lines or special applications
- Connectivity via standard USB cables or 2.4Ghz Wireless Telemetry
- Dedicated Wave Central PC analysis software with integrated SPC charting package


Featuring SolderStar
smartlink
connection System

Measure all key parameters in a single pass

The WaveShuttle Pro is an intelligent fixture that measures all key parameters from a single pass through the wave soldering machine. Thermocouples are combined with titanium contact sensors, allowing manufacturers to gain a true performance measurement of the wave soldering process.

CHIP WAVE
CONTACT AREA

MAIN WAVE
CONTACT AREA

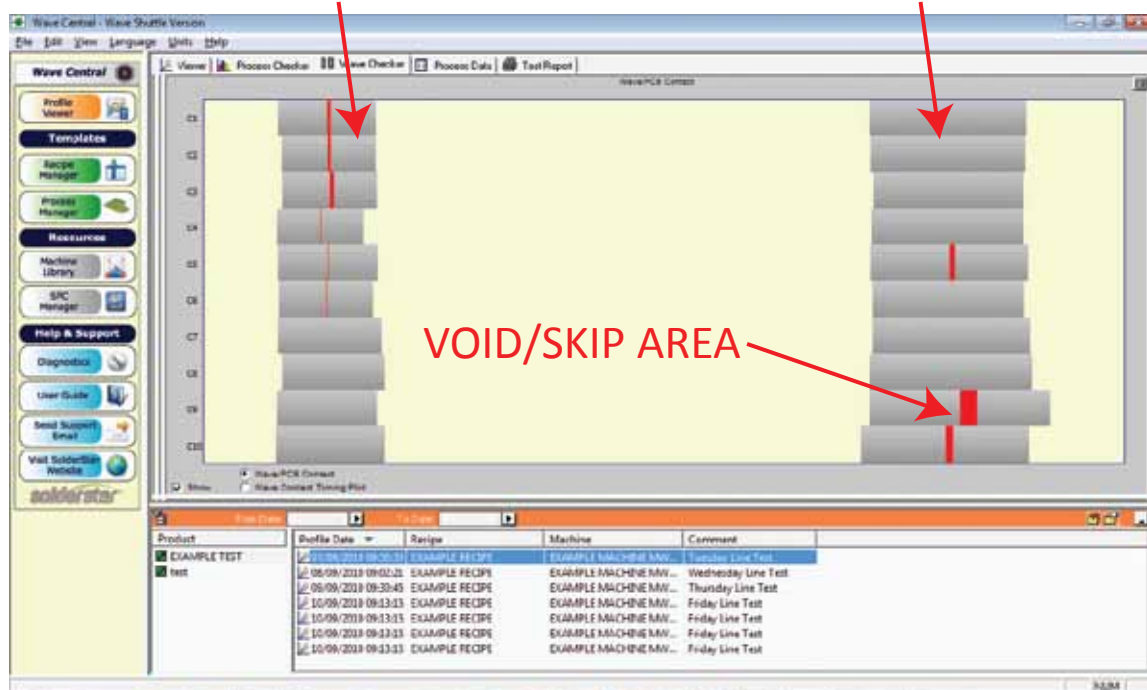

Parameters Measured

Main Wave and Chip Wave dwell/contact time
Wave Height / Immersion Depth
Conveyor speed
Top side PCB temperature (Left & Right)
Solder Pot temperature
Delta T at Wave
PCB/Wave Contact Area
PCB to Conveyor Parallelism
Component Heating Rates
Real component temperatures (via spare channels & user test PCB)

Technical Data

Construction	CDM Anti Static 10mm
Size (W x L x H)	250mm x 350mm x 30mm
Dwell Contacts	11 positions measured by on-pallet system
Contact sampling	All contacts 100 times per second
Timing accuracy	+/- 0.01 seconds
Wave Height Array	0.2 - 2.4mm
Temperature	Type K 2 x PCB top side (Left and Right) 1 x Solder Pot 2 x User PCB/Auxiliary TYPE K
Temperature Accuracy	+/- 1°C
Temperature Resolution	0.02°C (0.1°C displayed on graph)

Wireless Telemetry Option

Frequency	2.4GHZ Transceiver
Channels	128 Individual Channels
Protocol	Zigbee PRO - Duplex Transmission



Software

Compatibility	Windows™ XP Vista/Windows 7/8 32 & 64 Bit
Language Support	English, French, German, Italian, Portuguese, Spanish & Chinese

For further information and demonstration software visit www.solderstar.com

Standard Equipment

- 250mm Width Pallet
- PC Software on CDROM
- Equipment Case

This product can be supplied as a stand-alone system complete with datalogger, or as an accessory to an existing SolderStar system. Please contact SolderStar or your local supplier for the optimum configuration for your soldering processes.

Customisation

Custom size pallets are available to special order where specific sizes are required to meet the needs of your production lines.

Optional Equipment

- 2.4Ghz Wireless Telemetry

Additional Process Support



REFLOW • WAVE • VAPOUR

A range of process specific accessories are available to extend the system for use with Reflow, Wave/Selective Soldering and Vapour Phase processes.

SolderStar Ltd
Manchester UK
Tel: +44 (0)1706 354846
Fax: +44 (0)1706 675296
Email: info@solderstar.com
www.solderstar.com

Specification subject to change without notification